



SPECIFICATIONS – AVANT 745

LIFT CAPACITY

1400 kg

ENGINE POWER

49 hp diesel

LIFT HEIGHT

3 m

SPEED

15 km/h





LENGTH	3060 mm
WIDTH	1290 mm
HEIGHT	2060 mm
WEIGHT	1850 kg
STANDARD WHEELS	320/60-12 HD TR
TRANSMISSION, DRIVE	hydrostatic, Avant Optidrive™
PULLING FORCE MAX.	1330 kp
DRIVE SPEED MAX.	15 km/h
AUX. HYDRAULICS OIL FLOW / PRESSURE	70 l/min 225 bar
TURNING RADIUS INSIDE/OUTSIDE	1240 / 2780 mm
LIFTING HEIGHT TO PIVOT POINT	3080 mm
MAX. LIFTING CAPACITY (HYDR.)	2100 kg
MAX. TIPPING LOAD*	1400 kg
MAX. BREAKOUT FORCE / 50 CM	1700 kg
ENGINE MAKE AND TYPE	Kubota V2403 Stage 3B
ENGINE OUTPUT (ECE R120)	36 kW (49 hp)
MAXIMUM TORQUE	156 Nm @ 1600 rpm
FUEL	Diesel
PRODUCT NO:	A21727

*) with extra counterweights

PULLING FORCE

WHEEL SIZE	DRIVE SPEED	PULLING FORCE
320/60-12 and 26x12.00-12	15 km/h	1330 kp
320/55-15	16 km/h	1240 kp

WIDTH

WHEEL SIZE	PROFILE	WIDTH
27 x 8.50 - 15	TR	1030 mm

26 x 12.00 - 12	TR or grass	1295 mm	
320/55-15	TR	1295 mm	
(/global) GLOBAL	TR or grass	1305 mm	

HEIGHT WITH CAB

CAB TYPE	26X12.00-12 OR 320/60-12 WHEELS	320/55-15* WHEELS
L Cab	2060 mm	2094 mm
LX Cab	2078 mm	2112 mm
DLX Cab	2105 mm	2139 mm
DLX with A/C on the roof	2241 mm	2275 mm


*)With 400/50-15 machine is 30 mm higher

AVANT[®]

DIMENSIONS (mm)

GLOBAL



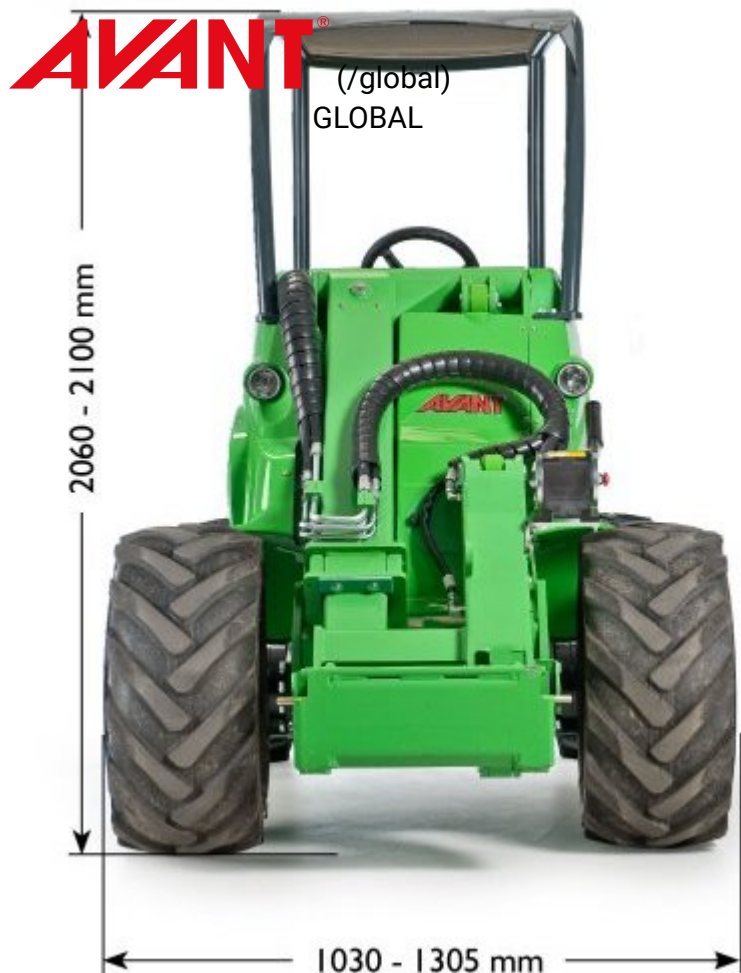

ask a question.

**CONTACT US ([HTTPS://WWW.AVANTTECNO.COM/GLOBAL/CONTACT-
INFORMATION/CONTACT-US](https://www.avanttecno.com/global/contact-information/contact-us))**